

Терморазъёмы EVERIS LQ4S

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: ccb@nt-rt.ru || сайт: <https://cpc.nt-rt.ru>

EVERIS® LQ4S SERIES CONNECTOR

Everis® LQ4S Series quick disconnect couplings

Offering a notable 1/4" flow relative to external dimensions, the couplings' patented design offers reliable long-term connections and dry break to protect sensitive equipment. EPDM seals are standard.

For other seal options or terminations, contact CPC.



SPECIFICATIONS

PRESSURE: Vacuum to 120 psi, 8.3 bar

TEMPERATURE:

Operating: 0°F to 240°F (-17°C to 115°C)

Storage/Shipping:

-40°F to 167°F (-40°C to 75°C)

MAXIMUM FLOW AT DISCONNECT:

3.0 gal/min, 11.3L/min at 0 – 120 psi

MATERIALS:

Main Components:

Stainless Steel 303/304

Valves and Thumb Latch: Polyphenylsulfone (PPSU)

Valve Springs (wetted): Stainless steel

External Spring: Stainless steel

Seals: EPDM

Compliance: RoHS, REACH

COLOR:

Steel with Black, Cool Blue or Warm Red

TUBING SIZES:

1/4" to 3/8" ID, 6.4mm to 9.5mm ID

LUBRICANTS: Krytox® PFPE

SPILLAGE:

<0.025 cc per disconnect rated at 0 psi

<0.055 cc per disconnect rated at 120 psi

INCLUSION: <0.025 cc per connect

FLOW COEFFICIENT:

Cv~1.4 Max (1.210 Kv)


WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC's products in their own application conditions.

FEATURES


- Dry break, non-spill valves → Disconnect under pressure with no spills
- Redundant multi-lobed seals → Extra protection from leak-causing contaminants and debris
- High flow capacity with low pressure drop → Efficient, cost-effective cooling system
- EPDM seals → Compatibility with common coolants and application temperatures
- Ergonomic body and latch design → Simple intuitive one handed operation and audible click signals secure connection
- Color coding → Instant visual identification of cooling lines
- Low profile → Meets size requirements for space-constrained electronics
- Barbed and threaded terminations → System design flexibility, including providing options

BENEFITS


LQ4S WATER FLOW (0-2 GPM)

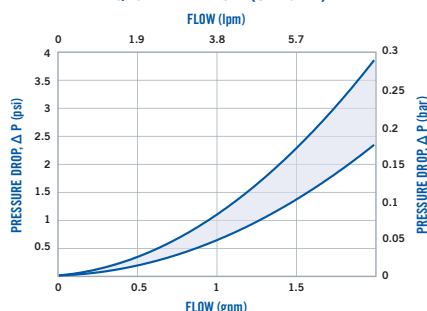

LQ4 FORCE TO CONNECT

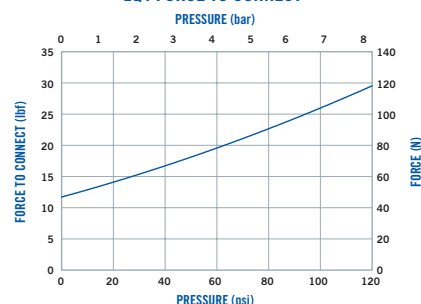

LQ4S WATER FLOW (0-10 GPM)

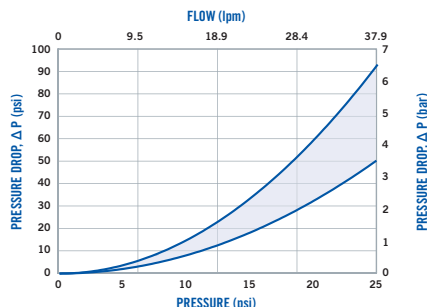

These graphs are intended to give you a general idea of the performance capabilities of each product line. Contact CPC for flow of a particular coupling combination.

EVERIS® LQ4S SERIES DIMENSIONS

COUPLING BODIES - Stainless steel

	TERMINATION	TUBING/THREAD SIZE	METRIC EQ.	SHUTOFF	A	B	C
	IN-LINE HOSE BARB	1/4" ID	6.4mm ID	LQ4SD17004	0.97 (24.6)	2.50 (63.5)	1.85 (47.0)
		1/4" ID	6.4mm ID	LQ4SD17004BLU	0.97 (24.6)	2.50 (63.5)	1.85 (47.0)
		1/4" ID	6.4mm ID	LQ4SD17004RED	0.97 (24.6)	2.50 (63.5)	1.85 (47.0)
	IN-LINE LOCKING HOSE BARB	1/4" ID	6.4mm ID	LQ4SD17004L	0.97 (24.6)	2.60 (66.0)	1.85 (47.0)
		1/4" ID	6.4mm ID	LQ4SD17004LBLU	0.97 (24.6)	2.60 (66.0)	1.85 (47.0)
		1/4" ID	6.4mm ID	LQ4SD17004LRED	0.97 (24.6)	2.60 (66.0)	1.85 (47.0)
		3/8" ID	9.5mm ID	LQ4SD17006L	0.97 (24.6)	2.71 (68.8)	1.83 (46.5)
		3/8" ID	9.5mm ID	LQ4SD17006LBLU	0.97 (24.6)	2.71 (68.8)	1.83 (46.5)
		3/8" ID	9.5mm ID	LQ4SD17006LRED	0.97 (24.6)	2.71 (68.8)	1.83 (46.5)


COUPLING INSERTS - Stainless steel

	TERMINATION	TUBING/THREAD SIZE	METRIC EQ.	SHUTOFF	A	B	C
	IN-LINE STRAIGHT THREAD PORT SAE	3/8 SAE-6: 9/16-18 ¹	6.4mm ID	LQ4SD46006	0.74 (18.8)	2.44 (62.0)	0.19 (4.8)
	IN-LINE G THREAD (BSPP)	G3/8	6.4mm ID	LQ4SD47006	0.74 (18.8)	2.44 (62.0)	0.19 (4.8)

For FKM seal option, add V suffix to part number. Example: LQ4D30006BLUV

¹All SAE terminations are compatible with SAE J1926-1 ports.

PRODUCT DIMENSIONS

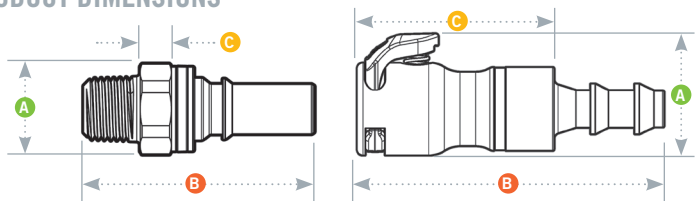

- A = Height/Diameter
- B = Total Length
- C = Connected Length

All measurements are in inches (millimeters) unless otherwise noted.

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новокузнецк (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: ccb@nt-rt.ru || сайт: <https://cpc.nt-rt.ru>